

NPEXA-C21A2

Single input, three outputs

Input: RTD

Output: 4 ~ 20 mA , relay


Temperature input isolated barrier, it converts the resistance signals from a hazardous area into 4~20mA signals to a safe area by isolation, two relay alarm outputs. It needs an independent power supply. The input, output, and power supply are galvanically isolated from each other. The self-test function is also available on this device. Calibrate the apparatus or modify parameters by using a handheld programmer.

Parameters


Power supply:	18V DC ~ 60V DC (Reverse power protection)
Power dissipation:	1.5W
Input signal:	RTD
Line resistance:	≤ 20Ω per line
Output signal:	Output1: 4 ~ 20mA Output2, Output3: relay contact (alarm value, hysteresis and delay time can be set)
Load resistance:	$R_L \leq 550\Omega$
Load capacity:	250VAC/2A, 30VDC/2A
Temperature drift:	30ppm/°C
Response time:	≤ 1s
Electromagnetic compatibility:	IEC 61326-3-1
Dielectric strength:	≥ 3000V AC (intrinsically safe side / non-intrinsically safe side) ≥ 1500V AC (Power supply /non-intrinsically safe side)
Insulation resistance:	≥ 100MΩ (Input /Output/Power supply)
Operation temperature:	-20°C ~ +60°C
Storage temperature:	-40°C ~ +80°C
Dimension:	17.8mm (W) × 110mm (H) × 117mm (D)
Output states:	Whatever input fault status (except breakage), the output follows the input within measuring range. And the maximum value would not exceed the 110% of the upper limit of the measuring range (e.g. When the output signal type is 0 ~ 20mA, the minimum output value may be 0mA, the maximum output value would not exceed 22mA)

Range and Conversion accuracy list

Type	Range	Min.span/Accuracy	
PT100	-200°C ~ +850°C	< 100°C, ±0.1°C	≥ 100°C, ±0.1% F.S.
Cu50	-50°C ~ +150°C	< 100°C, ±0.1°C	≥ 100°C, ±0.1% F.S.
Cu100	-50°C ~ +150°C	< 100°C, ±0.1°C	≥ 100°C, ±0.1% F.S.

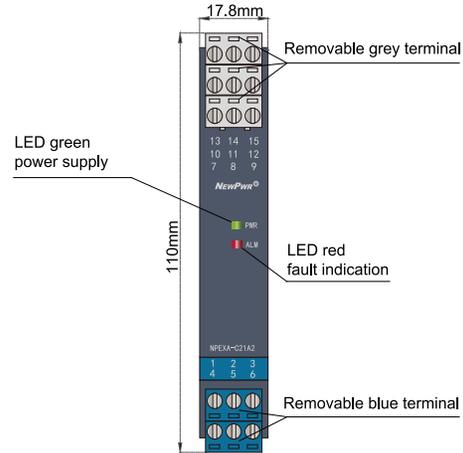

Wiring diagram

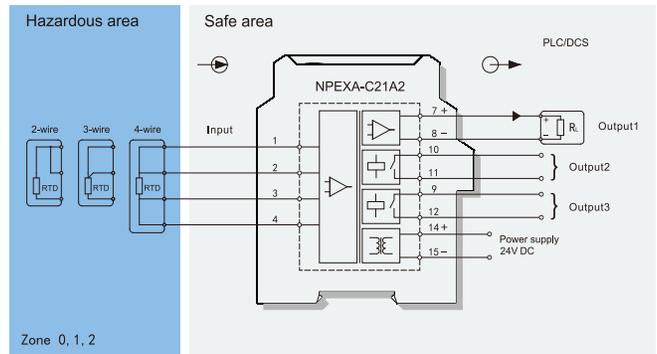

Explosive-proof parameters

China National Quality Supervision and Test Centre for Explosion Protected Electrical Products (CQST)

Ex marking: [Ex ia Ga] IIC
[Ex ia Da] IIIC

Um: 250V

Certified parameters (Terminals 1, 2, 3, 4):

Uo=10.5V, Io=38mA, Po=100mW

IIC: Co=0.65μF, Lo=14mH

IIIC(IIB): Co=14μF, Lo=56mH

Model rules

NPEXA-C2 A A2

- PB: BUS powered
- Default: Terminals powered
- The first output signal^{note1}

note1: output signal

Number	Output signal
1	4~20mA
2	1~5V
3	0~10mA
4	0~5V
5	0~10V
6	0~20mA